

1ST LINE

NAME OF LOCAL DEVICE FROM NAMING CONVENTION ON DETAIL SHEETS 260553-07, 08, 09.

**2ND LINE**


IF THE LOCAL DEVICE PROVIDES PROTECTION OR SWITCHING FOR A SINGLE EXTERNAL DEVICE, ENTER "FEEDS" ON THE 2ND LINE. IF THE LOCAL DEVICE PROVIDES PROTECTION OR SWITCHING FOR MULTIPLE EXTERNAL DEVICES OR IF THE LOCAL DEVICE DOES NOT PROVIDE PROTECTION OR SWITCHING FOR (AN) EXTERNAL DEVICE(S), ENTER "FED FROM" ON THE 2ND LINE.

### 3RD LINE

IF THE LOCAL DEVICE PROVIDES PROTECTION OR SWITCHING FOR AN EXTERNAL DEVICE, ENTER THE NAME OF THE EXTERNAL DEVICE ON LINE 3. IF THE LOCAL DEVICE PROVIDES PROTECTION OR SWITCHING FOR MULTIPLE EXTERNAL DEVICES OR IF THE LOCAL DEVICE DOES NOT PROVIDE PROTECTION OR SWITCHING FOR (AN) EXTERNAL DEVICE(S), ENTER THE NAME OF THE SOURCE FEEDING THE LOCAL DEVICE ON LINE 3.

#### 4TH LINE (OPTIONAL)


MOST TAGS WILL NOT REQUIRE MORE THAN 3 LINES. THEREFORE, THIS LINE SHALL ONLY BE USED IF THERE IS NOT ADEQUATE SPACE TO LENGTHEN THE SIZE OF THE TAG. TAGS WITH ONLY FOUR LINES SHALL BE ADJUSTED IN SIZE ACCORDINGLY.

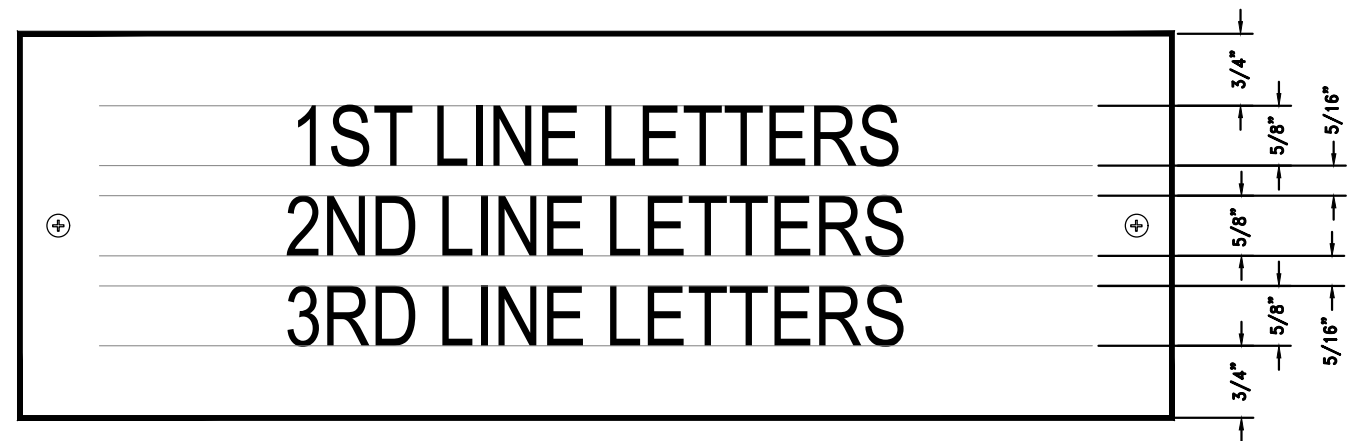

## DETAIL

NAMEPLATE DETAIL FOR  
5/8" TEXT HEIGHT  
SCALE: 1/2"=1"



R E V I S I O N S				PROJECT MANAGER: —		 <b>SEA-TAC INTERNATIONAL AIRPORT</b>  PROJECT: <b>F&amp;I STANDARD DETAILS</b>  SHEET TITLE: <b>LABELING DETAILS</b> <b>5/8" TEXT HEIGHT NAMEPLATE</b>		WORK PROJECT NO.	
NO.	DATE	BY	DESCRIPTION	PROJECT ENGINEER: —				CONSULTANT'S NO.	
1	03/01/2019	KDM	2019 F&I STANDARD DETAILS	DESIGN ENGINEER: —					
2	03/01/2020	KDM	2020 F&I STANDARD DETAILS	DRAFTER: —					
				SCALE: AS NOTED					
				DATE: —				PORT OF SEATTLE NO.	
				CHECKED/APPROVED BY: —				<b>260553</b> <b>11</b>	